

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number  
**WO 01/93466 A3**

- (51) International Patent Classification<sup>7</sup>: **H04B 10/18**
- (21) International Application Number: **PCT/JP01/04663**
- (22) International Filing Date: **1 June 2001 (01.06.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
2000-164929 **1 June 2000 (01.06.2000) JP**
- (71) Applicant: **SUMITOMO ELECTRIC INDUSTRIES, LTD.** [JP/JP]; 5-33, Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka 541-0041 (JP).
- (72) Inventors: **KUBO, Yuji**; c/o Yokohama Works of Sumitomo Electric Industries, Ltd., 1, Taya-cho, Sakae-ku, Yokohama-shi, Kanagawa 244-8588 (JP). **TERASAWA, Yoshiaki**; c/o Yokohama Works of Sumitomo Electric Industries, Ltd., 1, Taya-cho, Sakae-ku, Yokohama-shi, Kanagawa 244-8588 (JP).
- (74) Agents: **HASEGAWA, Yoshiki et al.**; SOEI PATENT AND LAW FIRM, Okura-honkan, 6-12, Ginza 2-chome, Chuo-ku, Tokyo 104-0061 (JP).
- (81) Designated States (*national*): CA, CN, IN, JP, KR.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report:  
**25 April 2002**
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **OPTICAL TRANSMISSION SYSTEM WITH CONTROL OF THE CHROMATIC DISPERSION**

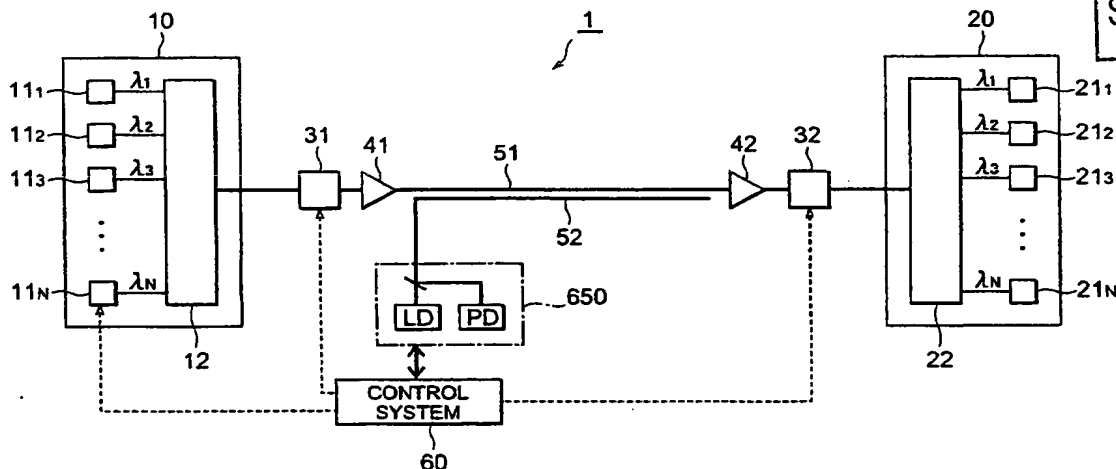

(57) Abstract: The invention relates to an optical transmission system having the structure of effectively suppressing variation in cumulative chromatic dispersion in an optical fiber transmission line from a transmitter to a receiver, thereby enabling large-capacity phototransmission. The optical transmission system according to the invention monitors variation of chromatic dispersion in the optical fiber transmission line and compensates for the variation of chromatic dispersion, thereby suppressing the variation of cumulative chromatic dispersion on the whole of the optical fiber transmission line. The variation of chromatic dispersion is calculated by monitoring temperature variation of the optical fiber transmission line or by letting monitor light propagate in a dummy fiber transmission line disposed in parallel to the optical fiber transmission line. On the other hand, the compensation for the variation of chromatic dispersion is implemented by shifting the wavelength of the signal from the transmitter to the longer wavelength side or to the shorter wavelength side or by use of a dispersion compensator such as a dispersion compensating optical fiber or the like.

WO 01/93466 A3

JP03-0109-0046  
-SE  
03.11.17  
SEARCH REPORT

# INTERNATIONAL SEARCH REPORT

II .ational Application No

PCT/JP 01/04663

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B10/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 909 297 A (NISHIMOTO HIROSHI ET AL) 1 June 1999 (1999-06-01) * Abstract * column 16, line 1 - line 12 column 20, line 1 -column 21, line 4 figures 29-35	1-8
P,X	EP 1 073 221 A (LUCENT TECHNOLOGIES INC) 31 January 2001 (2001-01-31) * Abstract* page 2, paragraph 7 page 3, paragraph 14 -page 4, paragraph 19 figures 1,11 --- -/--	1,5,6,8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

22 February 2002

Date of mailing of the international search report

28/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax (+31-70) 340-3016

Authorized officer

Carrasco Comes, N

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 01/04663

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 011 218 A (FUJITSU LTD) 21 June 2000 (2000-06-21) page 14, paragraph 80 -page 15, paragraph 85 figure 15	1,5
E	US 2001/048798 A1 (SASAKA EISUKE ET AL) 6 December 2001 (2001-12-06) page 3, paragraph 38 -page 4, paragraph 43 page 6, paragraph 53 - paragraph 54 figures 1,2,7,8	1,6,7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

I. International Application No

PCT/JP 01/04663

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5909297	A	01-06-1999	JP 8321805 A	03-12-1996
			EP 0700178 A2	06-03-1996
			US 5991477 A	23-11-1999
			US 5870213 A	09-02-1999
			US 5717510 A	10-02-1998
			US 5815294 A	29-09-1998
			US 5754322 A	19-05-1998
			US 5896217 A	20-04-1999
			US 5760937 A	02-06-1998
EP 1073221	A	31-01-2001	US 6307988 B1	23-10-2001
			EP 1073221 A1	31-01-2001
			JP 2001077756 A	23-03-2001
EP 1011218	A	21-06-2000	JP 2000236299 A	29-08-2000
			EP 1011218 A2	21-06-2000
US 2001048798	A1	06-12-2001	AU 7558600 A	14-08-2001
			WO 0158057 A1	09-08-2001

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number  
WO 01/93466 A2

- (51) International Patent Classification<sup>7</sup>: H04B 10/18 (74) Agents: HASEGAWA, Yoshiki et al.; SOEI PATENT AND LAW FIRM, Okura-honkan, 6-12, Ginza 2-chome, Chuo-ku, Tokyo 104-0061 (JP).
- (21) International Application Number: PCT/JP01/04663
- (22) International Filing Date: 1 June 2001 (01.06.2001) (81) Designated States (*national*): CA, CN, IN, JP, KR.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data:  
2000-164929 1 June 2000 (01.06.2000) JP  
Published:  
— without international search report and to be republished upon receipt of that report
- (71) Applicant: SUMITOMO ELECTRIC INDUSTRIES, LTD. [JP/JP]; 5-33, Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka 541-0041 (JP).  
*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*
- (72) Inventors: KUBO, Yuji; c/o Yokohama Works of Sumitomo Electric Industries, Ltd., 1, Taya-cho, Sakae-ku, Yokohama-shi, Kanagawa 244-8588 (JP). TERASAWA, Yoshiaki; c/o Yokohama Works of Sumitomo Electric Industries, Ltd., 1, Taya-cho, Sakae-ku, Yokohama-shi, Kanagawa 244-8588 (JP).

(54) Title: OPTICAL TRANSMISSION SYSTEM

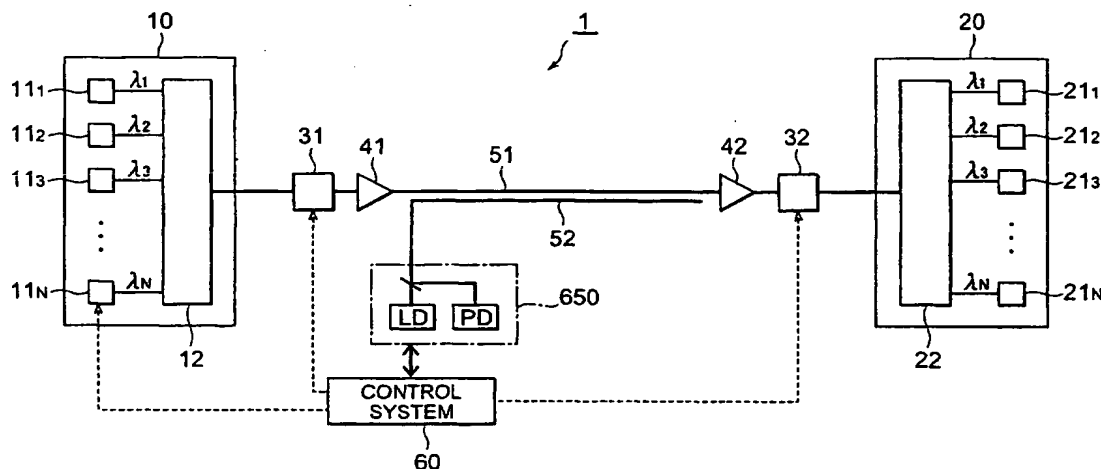

(57) Abstract: The invention relates to an optical transmission system having the structure of effectively suppressing variation in cumulative chromatic dispersion in an optical fiber transmission line from a transmitter to a receiver, thereby enabling large-capacity phototransmission. The optical transmission system according to the invention monitors variation of chromatic dispersion in the optical fiber transmission line and compensates for the variation of chromatic dispersion, thereby suppressing the variation of cumulative chromatic dispersion on the whole of the optical fiber transmission line. The variation of chromatic dispersion is calculated by monitoring temperature variation of the optical fiber transmission line or by letting monitor light propagate in a dummy fiber transmission line disposed in parallel to the optical fiber transmission line. On the other hand, the compensation for the variation of chromatic dispersion is implemented by shifting the wavelength of the signal from the transmitter to the longer wavelength side or to the shorter wavelength side or by use of a dispersion compensator such as a dispersion compensating optical fiber or the like.

## DESCRIPTION

### OPTICAL TRANSMISSION SYSTEM

#### Technical Field

The present invention relates to an optical  
5 transmission system for transmitting a signal from a  
transmitter through an optical fiber transmission line to  
a receiver.

#### Background Art

An optical transmission system is provided with an  
10 optical fiber transmission line placed between a transmitter  
and a receiver and transmits a signal from the transmitter  
to the receiver. This optical transmission system enables  
long-haul transmission of large capacity of information.  
Optical transmission systems of this type include wavelength  
15 division multiplexing (WDM) transmission systems for  
transmitting signals of multiple channels of mutually  
different wavelengths (in the form of multiplexed signal),  
which enable transmission of larger capacity of information.  
Concerning the optical transmission systems as described  
20 above, there are needs for further increase in capacity;  
specifically, there are attempts to expand a signal  
wavelength band and increase the number of signal channels  
and to increase bit rates of signals to higher rates.

In the optical transmission systems, there can occur  
25 reception errors due to degradation of signal waveform caused  
by chromatic dispersion in the optical fiber transmission

line. In the optical transmission systems it is thus important to keep small the absolute value of cumulative chromatic dispersion in the line from the transmitter to the receiver. Research and development is under way to provide a dispersion flattened fiber the absolute value of chromatic dispersion of which is small across the entire signal wavelength band, but the present status is that there are a lot of constraints on manufacturing and manufacturing cost is high. In general it is difficult to make small the absolute value of chromatic dispersion across the entire signal wavelength band by use of only one type of optical fiber. It is thus common practice to employ a technique of disposing a dispersion compensator, in addition to the fiber transmission line, between the transmitter and the receiver to compensate for the chromatic dispersion (and a dispersion slope) of the fiber transmission line and thereby maintaining the absolute value of cumulative chromatic dispersion in the line from the transmitter to the receiver, small across the entire signal wavelength band.

#### **Disclosure of the Invention**

The inventors studied the prior arts and found the following problem. Namely, the fiber transmission lines are often laid outdoors and are readily affected by external factors such as variation in ambient temperature in general. With occurrence of temperature variation, the chromatic dispersion also varies in the fiber transmission line, so

that the cumulative chromatic dispersion also varies in the entire transmission system incorporating the fiber transmission line and the dispersion compensator. For the conventional optical transmission systems, it is sufficient to control the variation of chromatic dispersion in the fiber transmission line due to the external factors such as the temperature variation to within design tolerance, but, in order to meet the recent needs for large-capacity information transmission, it is inevitable to narrow the tolerance of variation of cumulative chromatic dispersion in the line from the transmitter to the receiver. Even with occurrence of the variation in the external environment, such as the temperature, the variation in the absolute value of cumulative chromatic dispersion on the whole of the transmission system must be precisely managed so as to be maintained within tolerance. It is, however, not practical to control the variation of the external environment itself, such as the temperature of the fiber transmission line or the like, in order to suppress the variation of chromatic dispersion in the fiber transmission lines commonly laid outdoors.

The present invention has been accomplished in order to solve the above problem and an object of the invention is to provide an optical transmission system having such structure that even if the chromatic dispersion in the fiber transmission line varies because of the external factors



the variation of cumulative chromatic dispersion is effectively suppressed in the line from the transmitter to the receiver and it is feasible to further increase the capacity in information transmission.

5           Optical transmission systems according to the present invention include WDM transmission systems for transmitting the multiplexed signal of channels of mutually different wavelengths. An optical transmission system according to the present invention comprises an optical fiber transmission  
10 line disposed between a transmitter and a receiver, a dispersion compensating system for compensating for chromatic dispersion in the optical fiber transmission line, a measuring system for monitoring variation in temperature of the optical fiber transmission line or variation of  
15 chromatic dispersion in the optical fiber transmission line, and a control system for controlling a dispersion compensation amount of the dispersion compensating system, based on the result of measurement by the measuring system. In the optical fiber transmission line a signal from the  
20 transmitter (including the multiplexed signal of mutually different wavelengths) propagates toward the receiver.

As constructed in the above structure, even if there occurs change in the external environment, such as the temperature variation, in the optical fiber transmission  
25 line, the variation of cumulative chromatic dispersion will be effectively suppressed in the optical fiber transmission

line from the transmitter to the receiver (or the variation of cumulative chromatic dispersion due to the temperature variation or the like will be maintained within tolerance); therefore, the optical transmission system of the invention  
5 enables optical transmission of larger capacity than the conventional optical transmission systems.

In the optical transmission system according to the present invention, the foregoing measuring system is comprised of at least either of a configuration for monitoring  
10 change of the external environment being a factor to vary the chromatic dispersion in the optical fiber transmission line and a configuration for monitoring the variation of chromatic dispersion itself in the optical fiber transmission line.

15 In the case where the measuring system monitors the change of the external environment, e.g., temperature, the measuring system preferably includes a temperature sensor for detecting the temperature of the optical fiber transmission line. Preferably, the temperature sensor is,  
20 for example, an optical fiber temperature sensor of the Rayleigh scattering type, the Raman scattering type, the Brillouin scattering type, or the like (which is disposed along the optical fiber transmission line). In this case, where the temperature sensor is the optical fiber temperature  
25 sensor, the sensor detects a temperature distribution in the longitudinal direction of the optical fiber transmission

line. The optical fiber transmission line is applied to one transmission line in an optical cable in which a plurality of optical fibers are bundled. The optical fiber temperature sensor is more preferable, because it, together with the optical fiber transmission line, can be housed in the optical cable. The temperature sensor may monitor the temperature at a splice portion of the optical cable or the temperature in a repeater including an optical amplifier and others. Since the optical cable includes a tension member of metal extending along the optical fiber transmission line, the sensor may be of a configuration of monitoring the temperature variation by monitoring variation in metal resistance of the tension member. In either case, the control system calculates the variation of chromatic dispersion due to the temperature variation of the optical fiber transmission line, based on the temperature of the optical fiber transmission line detected by the temperature sensor, and controls the dispersion compensating system so that the dispersion compensation amount of the dispersion compensating system becomes an appropriate value.

On the other hand, in the case where the foregoing measuring system is one for monitoring the variation of chromatic dispersion itself in the optical fiber transmission line, the measuring system preferably includes a dummy fiber transmission line disposed along the optical fiber transmission line, a light source for emitting monitor light

of a predetermined wavelength into the dummy fiber transmission line, and a photodetector for receiving the monitor light having propagated through the dummy fiber transmission line. In this case, the control system  
5 calculates an amount of variation of chromatic dispersion in the optical fiber transmission line, based on the result of detection of light quantity by the photodetector, and controls the dispersion compensating system so that the dispersion compensation amount of the dispersion  
10 compensating system becomes an appropriate value.

In the optical transmission system according to the present invention, the dispersion compensation by the dispersion compensating system is implemented by a configuration making use of a dispersion compensator such  
15 as a dispersion compensating optical fiber or a fiber grating, or by a configuration of adjusting the wavelength of the signal sent out of the transmitter (or adjusting the wavelength of each signal channel in the case of the multiplexed signal). In the structure where the dispersion  
20 compensating system includes the dispersion compensator, a plurality of dispersion compensators can be installed on the signal propagating path and it becomes feasible to implement fine adjustment of dispersion amount on the whole of the optical transmission system, by individually adjusting  
25 dispersion compensation amounts of those dispersion compensators.

On the other hand, in the case where the dispersion compensation by the dispersion compensating system is implemented by adjusting the wavelength of the signal sent out of the transmitter, in every signal channel, the control system calculates an average change amount of chromatic dispersion on the whole of the optical fiber transmission line and controls light sources so that the wavelengths of signals emitted from the respective light sources in the transmitter are shifted by a predetermined amount to the longer wavelength side or to the shorter wavelength side according to the change amount obtained.

In either of these dispersion compensations, the variation of cumulative chromatic dispersion will be effectively suppressed in the line from the transmitter to the receiver even if there occurs change of the external environment such as the temperature variation of the optical fiber transmission line.

The present invention will be more fully understood from the detailed description given hereinbelow and the accompanying drawings, which are given by way of illustration only and are not to be considered as limiting the present invention.

Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating

preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will be apparent to those skilled in the art from this detailed description.

5      **Brief Description of the Drawings**

Fig. 1 is a drawing showing a configuration of a first embodiment of the optical transmission system according to the present invention;

10      Fig. 2 is a view showing a cross-sectional structure of an optical cable (including optical fiber transmission lines and an optical fiber temperature sensor) to which the optical fiber transmission line constituting part of the optical transmission system according to the first embodiment is applied;

15      Fig. 3 is a graph for explaining an example of dispersion compensation (compensation for chromatic dispersion due to temperature variation) by the control system in the optical transmission system according to the present invention;

20      Fig. 4 is a graph for explaining another example of dispersion compensation (compensation for chromatic dispersion due to temperature variation) by the control system in the optical transmission system according to the present invention; and

25      Fig. 5 is a drawing showing a configuration of a second embodiment of the optical transmission system according to the present invention.

### Best Modes for Carrying Out the Invention

Each of embodiments of the optical transmission system according to the present invention will be described below in detail with reference to Figs. 1 to 5. In the description of the drawings the same elements will be denoted by the same reference symbols and redundant description will be omitted.

Fig. 1 is a drawing showing the configuration of the first embodiment of the optical transmission system according to the present invention. In this optical transmission system according to the first embodiment, the dispersion compensation is implemented by making use of temperature dependence of chromatic dispersion. For example, the technology described in United States Patent Application No. 09/771937 is one of technologies for detecting the variation of chromatic dispersion by measurement of temperature, and the first embodiment employs the optical fiber temperature sensor as the temperature sensor from the viewpoint of enabling highly accurate control of chromatic dispersion and enabling compactification of apparatus itself.

The optical transmission system 1 according to the first embodiment transmits the multiplexed signal of wavelengths  $\lambda_1$  to  $\lambda_N$  from transmitter 10 through optical fiber transmission line 51 to receiver 20. The optical transmission system 1 has the transmitter 10 and the receiver

20, and also includes a dispersion compensator 31, an optical amplifier 41, the optical fiber transmission line 51, an optical amplifier 42, and a dispersion compensator 32, which are arranged in the order named from the transmitter 10 to the receiver 20. This optical transmission system 1 is further provided with optical fiber temperature sensor 52 and control system 60.

The dispersion compensator 31 and optical amplifier 41 may be disposed together with the transmitter 10 in a transmitting station, or may be disposed in a repeater station. The dispersion compensator 32 and optical amplifier 42 may be disposed together with the receiver 20 in a receiving station, or may be disposed in a repeater station. The optical fiber transmission line 51, optical amplifier 42, and dispersion compensator 32 may be of a single-stage configuration as illustrated, or of a multistage configuration.

The transmitter 10 includes N light sources  $11_1$  to  $11_N$  and a multiplexer 12. Signals of wavelengths  $\lambda_1$  to  $\lambda_N$  emitted from the respective light sources  $11_1$  to  $11_N$  are multiplexed by the multiplexer 12 and the multiplexed signal is sent from the multiplexer 12 through the dispersion compensator 31 and optical amplifier 41 into the optical fiber transmission line 51. On the other hand, the receiver 20 includes N photoreceptive devices (photodetectors)  $21_1$  to  $21_N$  and a demultiplexer 22. The multiplexed signal arriving



at the receiver 20 is demultiplexed once into signals of wavelengths  $\lambda_1$  to  $\lambda_N$  by the demultiplexer 22 and the signals thus demultiplexed are then received by the respective photoreceptive devices 21<sub>1</sub> to 21<sub>N</sub> provided corresponding to the respective signals. The signals of the wavelengths  $\lambda_1$  to  $\lambda_N$  are, for example, those in the 1.55- $\mu$ m wavelength band.

The optical fiber transmission line 51 is a transmission medium for transmitting the multiplexed signal from the transmitter 10 to the receiver 20, and is normally laid outdoors. An optical fiber suitable for construction of the optical fiber transmission line 51 is, for example, a single-mode optical fiber having the zero dispersion wavelength near the wavelength of 1.3  $\mu$ m and the chromatic dispersion of about 17 ps/nm/km at the wavelength of 1.55  $\mu$ m, or a non-zero dispersion-shifted optical fiber having the zero dispersion wavelength present in a range except for the vicinity of the wavelength of 1.55  $\mu$ m and the chromatic dispersion of 1 to 10 ps/nm/km at the wavelength of 1.55  $\mu$ m.

The dispersion compensators 31, 32 compensate for the chromatic dispersion of the optical fiber transmission line 51 and the dispersion slope of the optical fiber transmission line 51 at a predetermined temperature T in the signal wavelength band including the wavelengths  $\lambda_1$  to  $\lambda_N$ . The dispersion compensators 31, 32 are suitably selected, for

example, from dispersion compensating optical fibers having negative chromatic dispersion at the wavelength of 1.55  $\mu$ m, dispersion compensating optical fibers having a negative dispersion slope at the wavelength of 1.55  $\mu$ m, or optical fiber gratings with index modulation in an optical waveguide region. These dispersion compensators 31, 32 are included in the dispersion compensating system.

The optical amplifiers 41, 42 are optical devices for amplifying the multiplexed signal from the transmitter 10 en bloc, and suitable optical amplifiers are Er-doped optical fiber amplifiers (EDFA: Erbium-Doped Fiber Amplifiers) in which an Er-doped optical fiber (EDF: Erbium-Doped Fiber) with an optical waveguide region doped with element Er is applied as an optical amplification medium.

The optical fiber temperature sensor 52 is disposed in parallel to the optical fiber transmission line 51 and can be selected, for example, from the known optical fiber temperature sensors of the Rayleigh scattering type, the Raman scattering type, the Brillouin scattering type, and so on. The temperature detection by measuring system 650 is one utilizing the temperature dependence of optical fiber characteristics, and the measuring system 650 has a light source LD for emitting pulsed light from the control system 60 toward one end of the optical fiber temperature sensor 52, and a photodetector PD for detecting backscattered light generated in the optical fiber temperature sensor 52 and

reaching the one end. The control system 60 monitors temporal change from the time of output of the pulsed light to the arrival of the backscattered light and (based on the result of measurement by the measuring system 650) thereby detects a temperature distribution in the longitudinal direction of the optical fiber temperature sensor 52, i.e., a temperature distribution in the longitudinal direction of the optical fiber transmission line 51. Further, the control system 60 controls a dispersion compensating operation so as to compensate for the chromatic dispersion of the optical fiber transmission line 51, based on the result of detection of the temperature distribution of the optical fiber transmission line 51. As a result of this dispersion compensation, the variation of cumulative chromatic dispersion is suppressed in the line from the transmitter 10 to the receiver 20 even with temperature variation of the optical fiber transmission line 51. This dispersion compensation can be implemented as follows; the control system 60 controls the light sources  $11_1$  to  $11_N$  so as to shift the wavelengths of the signals emitted from the respective light sources  $11_1$  to  $11_N$  of the transmitter 10 to the longer wavelength side or to the shorter wavelength side. In this case, the dispersion compensating system is composed of the control system 60 and the light sources  $11_1$  to  $11_N$ . The dispersion compensation can also be implemented so that the control system 60 controls a dispersion compensation amount

in the dispersion compensator 31 and/or the dispersion compensator 32. In this case, the dispersion compensating system is composed of the control system 60 and the dispersion compensators 31, 32.

5            Fig. 2 is a view showing the cross-sectional structure of optical cable 50 including the above-mentioned optical fiber transmission lines 51 and the optical fiber temperature sensor 52. The optical cable 50 has a slotted rod 53 provided with a tension member 54 of metal in the center. Six slots  
10           are provided along the longitudinal direction in the outer periphery surface of the slotted rod 53. The optical fiber temperature sensor 52 is set in one of the six slots and a plurality of ribbon fibers 55 (each of which includes a plurality of optical fibers placed on a flat basis as optical  
15           fiber transmission lines 51) are housed in a stacked state in each of the five rest slots. An envelope 56 covers the periphery of the slotted rod 53 in which the optical fiber transmission lines 51 and the optical fiber temperature sensor 52 are set in the respective slots as described above.  
20           The optical fibers in each ribbon fiber 55 correspond to the optical fiber transmission lines 51, respectively.

            In the optical transmission system 1 according to the first embodiment, the transmitter 10 emits the multiplexed signal of the wavelengths  $\lambda_1$  to  $\lambda_N$  (resulting from  
25           multiplexing of the signals emitted from the light sources 11<sub>1</sub> to 11<sub>N</sub>, in the multiplexer 12) and the multiplexed signal

travels successively through the dispersion compensator 31, optical amplifier 41, optical fiber transmission line 51, optical amplifier 42, and dispersion compensator 32 to reach the receiver 20. The multiplexed signal reaching the  
5 receiver 20 is demultiplexed in every wavelength (every signal channel) by the demultiplexer 22 and the signals of the respective wavelengths are received by the corresponding photodetectors  $21_1$  to  $21_N$ . The cumulative chromatic dispersion during the traveling period of the multiplexed  
10 signal from the transmitter 10 to the receiver 20 is the cumulative sum of chromatic dispersions in all the elements on the transmission path of the multiplexed signal and, particularly, the optical fiber transmission line 51 and dispersion compensators 31, 32 make great contribution to  
15 the chromatic dispersion. Since the chromatic dispersions of the respective dispersion compensators 31, 32 are set so as to compensate for the chromatic dispersion of the optical fiber transmission line 51 at the given temperature  $T$ , the absolute value of cumulative chromatic dispersion in the  
20 line from the transmitter 10 to the receiver 20 is kept small at this temperature  $T$ . When the temperature of the optical fiber transmission line 51 varies from  $T$  to  $T + \Delta T$ , the temperature variation  $\Delta T$  is detected by the optical fiber temperature sensor 52, measuring system 650, and control  
25 system 60. Then the control system 60 executes the dispersion compensation control so as to suppress the variation in the

chromatic dispersion of the optical fiber transmission line 51, based on the result of the temperature detection of the optical fiber transmission line 51.

Fig. 3 is a graph for explaining an example of the dispersion compensation by the control system 60, i.e., a case of compensating for the variation in chromatic dispersion due to the temperature variation of the optical fiber transmission line 51, by controlling the wavelength of the signal from each light source  $11_n$  ( $1 \leq n \leq N$ ) in the transmitter 10. In Fig. 3 a curve G410 indicates a chromatic dispersion property of the optical fiber transmission line 51 at the temperature  $T$  and a curve G420 that of the optical fiber transmission line 51 at the temperature  $T + \Delta T$ .

We assume here that the output wavelength  $\lambda_n$  of the light source  $11_n$  in the transmitter 10 is kept constant. When the temperature  $T$  varies by  $\Delta T$  to the temperature  $T + \Delta T$ , the chromatic dispersion  $D_n$  at the temperature  $T$  changes to  $D_n + \Delta D$ . As a result, the cumulative chromatic dispersion varies in the line from the transmitter 10 to the receiver 20. Detecting the variation of  $\Delta T$  in the temperature of the optical fiber transmission line 51 through the temperature measurement by the measuring system 650 using the optical fiber temperature sensor 52, the control system 62 then controls the temperature, driving current, etc. of the light source  $11_n$  in the transmitter 10 to change the wavelength of the signal emitted from the light source  $11_n$ ,

to  $\lambda_n'$  (to make use of the wavelength dependence of dispersion). This compensates for the variation of chromatic dispersion of the optical fiber transmission line 51.

Fig. 4 is a graph for explaining another example of the dispersion compensation by the control system 60, i.e., a case of compensating for the variation of chromatic dispersion due to the temperature variation of the optical fiber transmission line 51, by controlling a dispersion compensation amount in the dispersion compensating optical fibers as dispersion compensators 31, 32. In Fig. 4 a curve G510 represents a chromatic dispersion property of the optical fiber transmission line 51 at the temperature  $T_1$ , a curve G530 that at the temperature  $T_1 + \Delta T_1$ , a curve G520 a chromatic dispersion property of each dispersion compensator 31, 32 at the temperature  $T_2$ , and a curve G540 that at the temperature  $T_2 + \Delta T_2$ .

Let us suppose that when the temperature of the optical fiber transmission line 51 is  $T_1$  and the temperature of the dispersion compensators 31, 32 is  $T_2$ , the absolute value of cumulative chromatic dispersion is sufficiently small in the line from the transmitter 10 to the receiver 20. If the temperature of the optical fiber transmission line 51 varies by  $\Delta T_1$  to the temperature  $T_1 + \Delta T_1$  under such circumstances, the cumulative chromatic dispersion varies in the line from the transmitter 10 to the receiver 20. Then the control system 60 detects the variation of  $\Delta T_1$  in the temperature

of the optical fiber transmission line 51 through the temperature measurement by the measuring system using the optical fiber temperature sensor 52. Then the control system 60 changes the temperature of the dispersion compensators 31, 32 by  $\Delta T_2$  to control the dispersion compensation amount, thereby compensating for the variation of chromatic dispersion of the optical fiber transmission line 51.

When optical fiber gratings are used as the dispersion compensators 31, 32, their dispersion compensation amount is controlled by changing the temperature of the optical fiber gratings or tension exerted thereon, thereby compensating for the variation of chromatic dispersion of the optical fiber transmission line 51.

The present invention is by no means intended to be limited to the above embodiments, but can be subject to a variety of modifications. For example, the measuring system for measuring the temperature of the fiber transmission line 51 is preferably one for detecting the temperature by use of the optical fiber temperature sensor 52 as described above, but is not limited to this.

For example, since the tension member 4 in the optical cable 50 is usually a metal material, an average temperature in the longitudinal direction of the optical fiber transmission line 51 can be detected by measuring the conductor resistance of this tension member 54 by the measuring system. When the tension member 54 is one plated



with a metal of low resistance, e.g., copper on the surface, it becomes feasible to detect the temperature with high accuracy over a long distance.

5 Since the temperature distribution in the longitudinal direction of the optical fiber transmission line 51 exhibits only a small temperature difference over a distance of about several ten km, the temperature does not have to be detected at small intervals of distance. For example, the temperature may be detected at a splice portion or at a repeater of the  
10 optical cable 50. The information about the result of this temperature detection is sent as a control signal through an optical fiber in the optical cable 50 to the control system 60.

As described above, the optical transmission system  
15 1 according to the first embodiment has the configuration of effectively suppressing the variation of cumulative chromatic dispersion in the line from the transmitter 10 to the receiver 20 by making use of the temperature change of the optical fiber transmission line 51, but the dispersion  
20 compensation may also be implemented by directly measuring the variation of cumulative chromatic dispersion, as in the optical transmission system 100 according to the second embodiment described below. Fig. 5 is a view showing the configuration of the second embodiment of the optical  
25 transmission system according to the present invention. The optical transmission system 100 according to the second

embodiment has the same structure as the structure of the optical transmission system 1 according to the first embodiment, except for the structure for measuring the cumulative chromatic dispersion.

5           Namely, the optical transmission system 100 according to the second embodiment is provided with a dummy fiber transmission line 520 of a closed loop in which monitor light of a wavelength  $\lambda_x$  propagates and which is disposed along the optical fiber transmission line 51. The dummy fiber  
10           transmission line 520 may be an open loop transmission line one end of which is processed so as to totally reflect light (structure similar to the optical fiber temperature sensor 52 in Fig. 1).

          The measuring system 600 is provided with a light source  
15           LD for emitting the monitor light of the wavelength  $\lambda_x$  into the dummy fiber transmission line 520 and a photodetector PD for receiving the monitor light having propagated through the dummy fiber transmission line 520. Since the optical  
20           fiber transmission line 51 and the dummy fiber transmission line 520 constitute the optical cable of the structure as shown in Fig. 2, the optical fiber transmission line 51 and dummy fiber transmission line 520 are set under the same environment. Accordingly, by monitoring the variation of  
25           cumulative chromatic dispersion of the dummy fiber transmission line 520 (and letting the control system 60 calculate a variation amount of chromatic dispersion, based

on the result of measurement by the measuring system 600), it becomes feasible to analogize the variation of cumulative chromatic dispersion in the optical fiber transmission line 51 with high accuracy.

5           In the second embodiment, the compensation for the cumulative chromatic dispersion in the optical fiber transmission line 51 is implemented by controlling each of the wavelengths of the signals emitted from the respective light sources  $11_1$  to  $11_N$  included in the transmitter 10, or  
10       by controlling the dispersion compensation amount of the dispersion compensators 31, 32 such as the dispersion compensating optical fibers, the optical fiber gratings, or the like. In the case of the dispersion compensation by the control of wavelengths of output signals, the light  
15       sources  $11_1$  to  $11_N$  and control system 60 constitute the dispersion compensating system. In the case of the dispersion compensation by the dispersion compensators 31, 32, these dispersion compensators 31, 32 and the control system 60 constitute the dispersion compensating system.

20           From the invention thus described, it will be obvious that the embodiments of the invention may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art  
25       are intended for inclusion within the scope of the following claims.

### Industrial Applicability

As described above, the optical transmission systems according to the present invention have the structure of directly or indirectly detecting the variation amount of cumulative chromatic dispersion of the optical fiber transmission line for transmitting the signal from the transmitter to the receiver and the structure of suppressing the variation of chromatic dispersion in the optical fiber transmission line, based on the result of the detection. By provision of these structures, the variation of cumulative chromatic dispersion will be effectively suppressed in the line from the transmitter to the receiver even if the variation of chromatic dispersion due to the change of the external environment such as the temperature in the optical fiber transmission line occurs in part or in whole of the optical fiber transmission line. As a result, the variation of cumulative chromatic dispersion in the fiber transmission line due to the external factors is maintained within tolerance, thereby enabling larger-capacity phototransmission.

When the optical fiber temperature sensor is used for the detection of variation of chromatic dispersion, the temperature distribution in the longitudinal direction of the optical fiber transmission line is detected with accuracy. When the dummy fiber transmission line is used, the variation of chromatic dispersion in the fiber transmission line is

detected with accuracy. Therefore, these configurations enable stabler phototransmission. The configurations both are preferable, because the optical fiber temperature sensor or the dummy fiber transmission line can be housed together  
5 with the optical fiber transmission line in the optical cable.

## CLAIMS

1. An optical transmission system comprising:

an optical fiber transmission line disposed between  
a transmitter for transmitting a signal of a predetermined  
wavelength and a receiver for receiving the signal, through  
which the signal propagates from the transmitter toward the  
receiver;

a dispersion compensating system for compensating for  
chromatic dispersion in said optical fiber transmission line;

a measuring system for monitoring variation in  
temperature of said optical fiber transmission line or  
variation of chromatic dispersion in said optical fiber  
transmission line; and

a control system for controlling a dispersion  
compensation amount of said dispersion compensator, based  
on the result of measurement by said measuring system.

2. An optical transmission system according to claim  
1, wherein said measuring system includes a temperature  
sensor for detecting the temperature of said optical fiber  
transmission line.

3. An optical transmission line according to claim  
1, wherein said measuring system includes a dummy fiber  
transmission line disposed along said optical fiber  
transmission line, a light source for emitting monitor light  
of a predetermined wavelength into the dummy fiber  
transmission line, and a photodetector for receiving the

monitor light having propagated through the dummy fiber transmission line, and wherein said control system calculates a variation amount of chromatic dispersion in said optical fiber transmission line, based on the result of detection of light quantity by the photodetector.

4. An optical transmission system according to claim 2, wherein said temperature sensor includes an optical fiber temperature sensor disposed along said optical fiber transmission line.

5. An optical transmission system according to claim 1, wherein said dispersion compensating system shifts the wavelength of the signal from said transmitter to the longer wavelength side or to the shorter wavelength side, thereby compensating for the variation of chromatic dispersion due to variation in temperature of said optical fiber transmission line.


6. An optical transmission system according to claim 1, wherein said dispersion compensating system includes a dispersion compensator disposed on a signal light path from said transmitter to said receiver, and wherein said control system controls the dispersion compensation amount of said dispersion compensator according to a variation amount of chromatic dispersion in said optical fiber transmission line.


7. An optical transmission system according to claim 6, wherein said dispersion compensator includes a dispersion compensating optical fiber.


8. An optical transmission system according to claim 6, wherein said dispersion compensator includes an optical fiber grating.



Fig.1

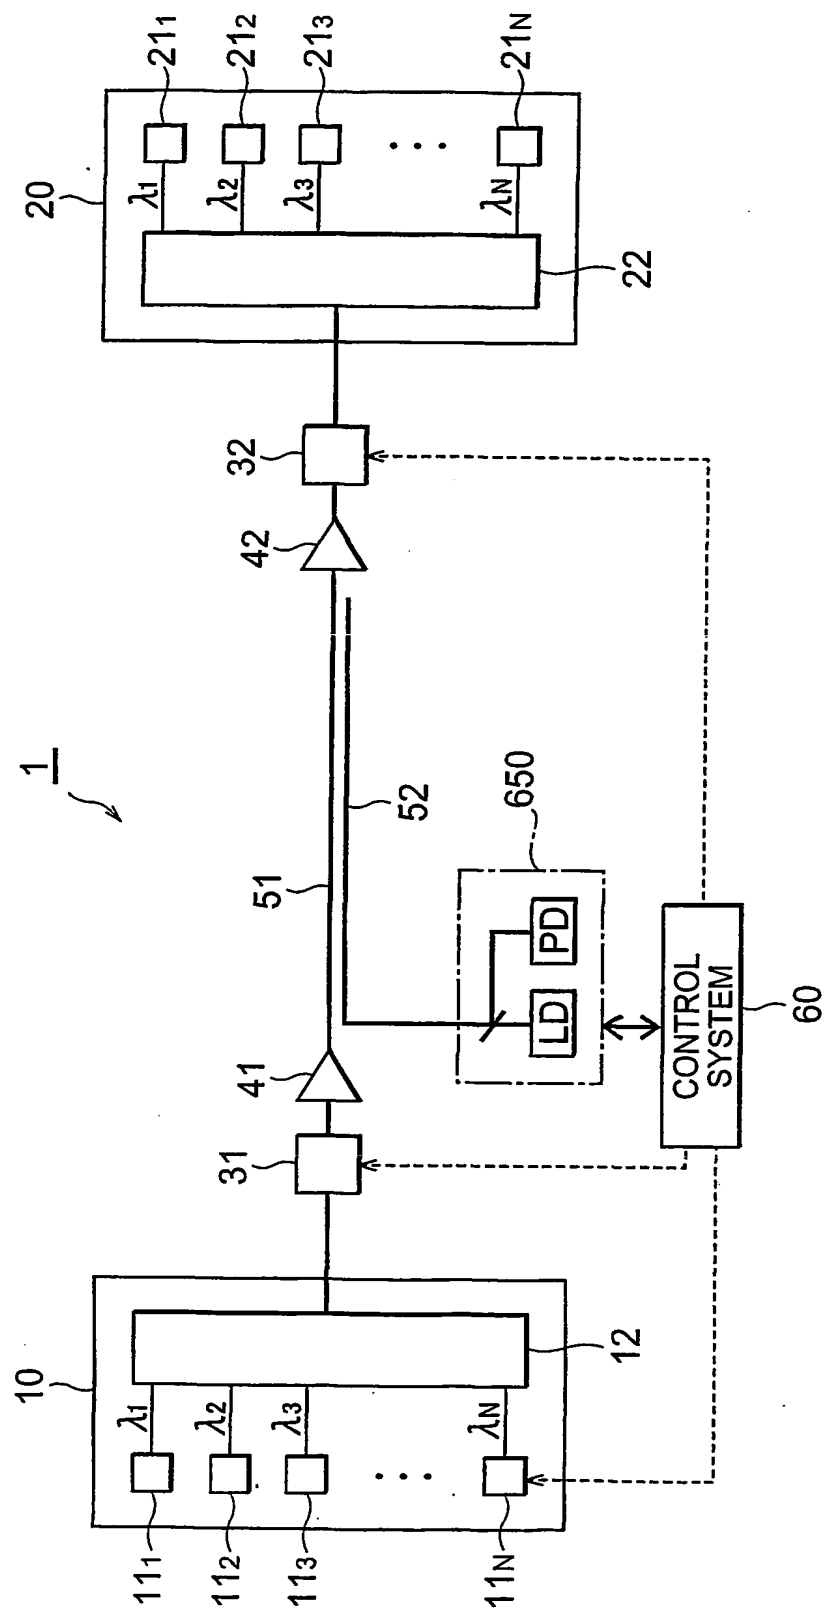

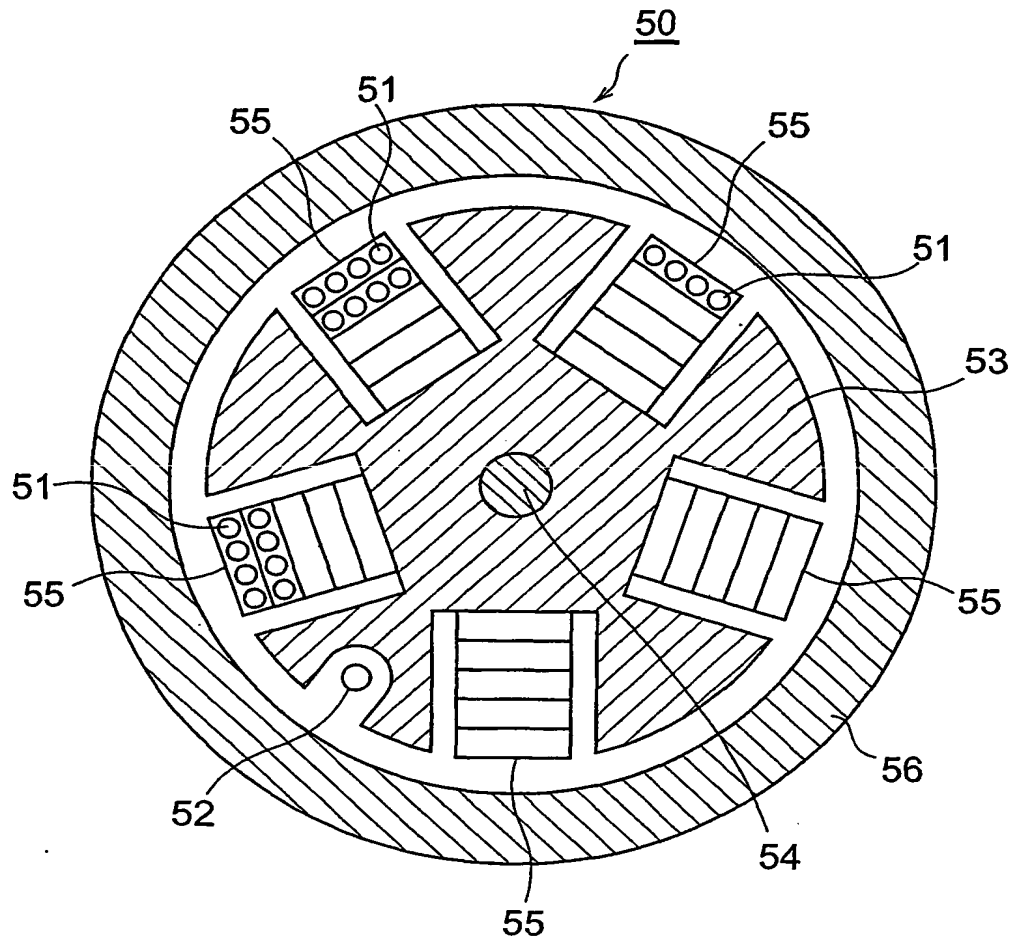**Fig.2**

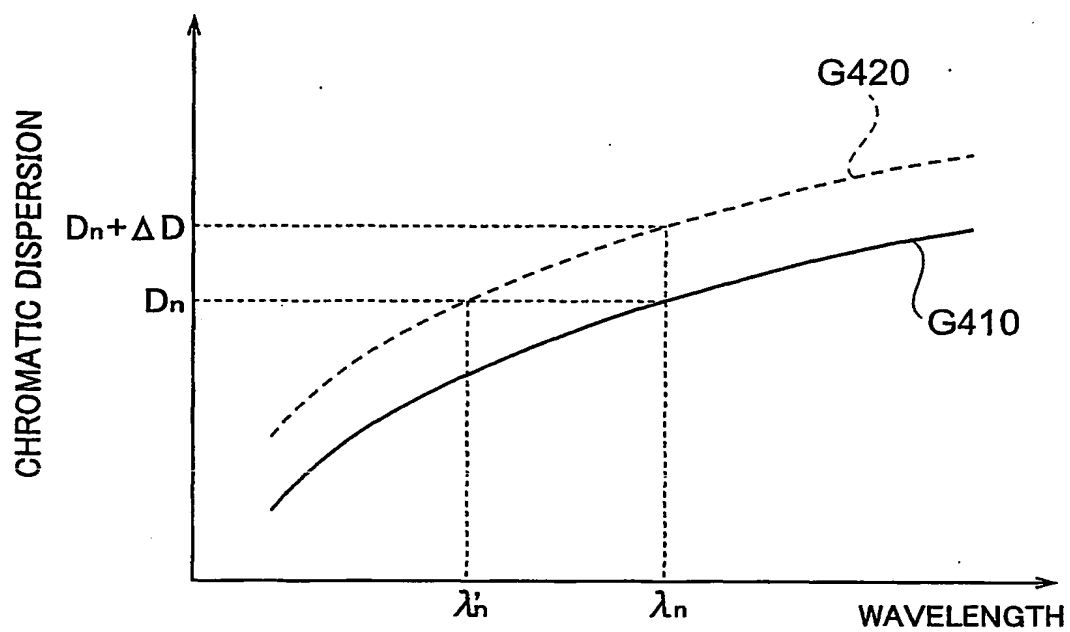**Fig.3**

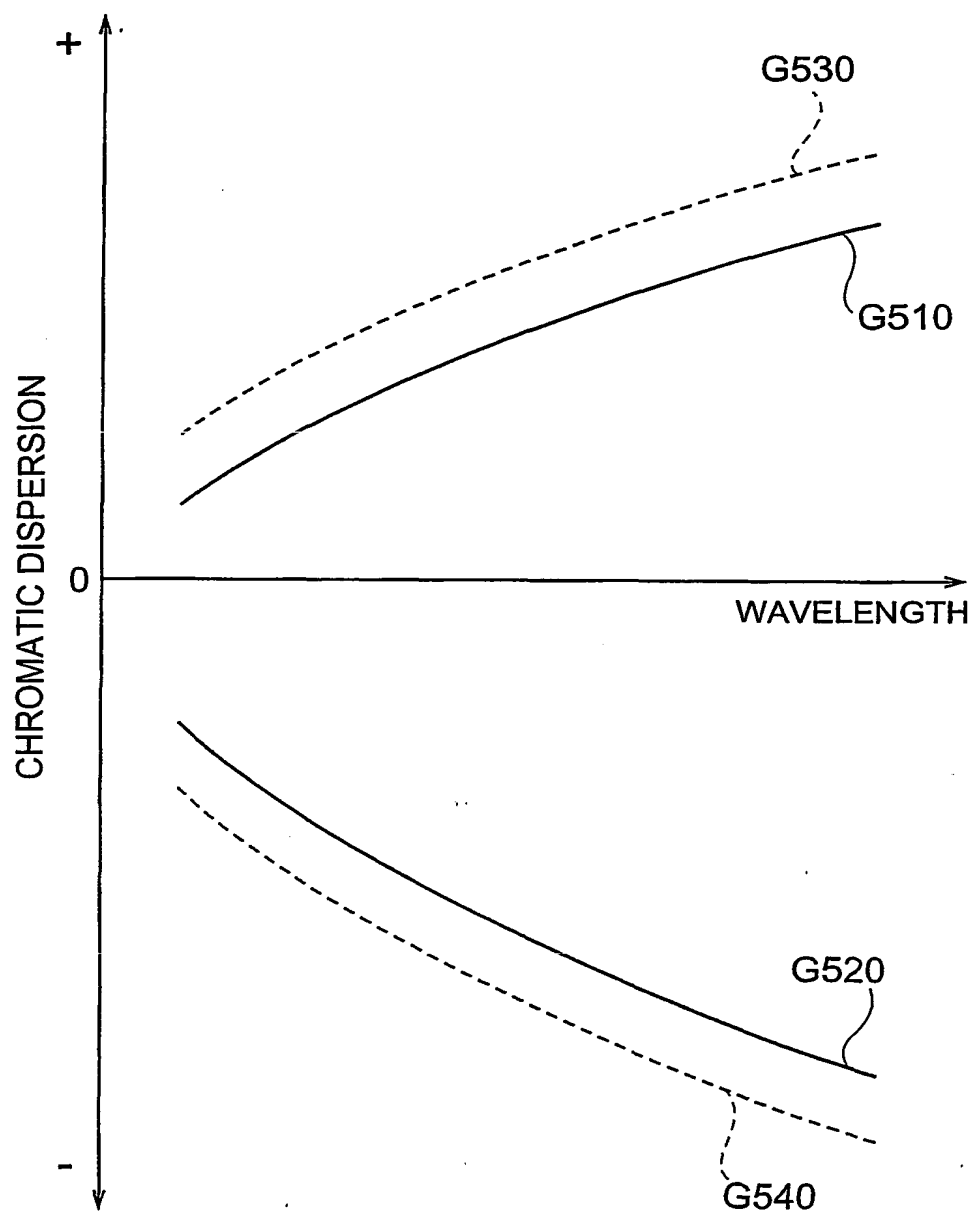
**Fig.4**

Fig.5

